
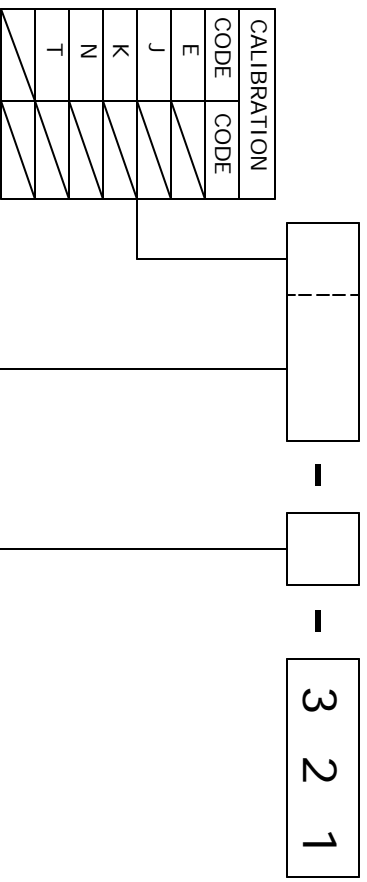


HIGH TEMPERATURE BRAIDED FIBERGLASS THERMOCOUPLE AND EXTENSION WIRE



CONDUCTOR TYPE / TOLERANCE	
CODE	DESCRIPTION
1	THERMOCOUPLE GRADE, SOLID WIRE, STANDARD TOLERANCES
2	THERMOCOUPLE GRADE, SOLID WIRE, SPECIAL TOLERANCES
3	THERMOCOUPLE GRADE, STRANDED WIRE, STANDARD TOLERANCES
4	THERMOCOUPLE GRADE, STRANDED WIRE, SPECIAL TOLERANCES
5	EXTENSION GRADE, SOLID WIRE, STANDARD TOLERANCES
6	EXTENSION GRADE, SOLID WIRE, SPECIAL TOLERANCES
7	EXTENSION GRADE, STRANDED WIRE, STANDARD TOLERANCES
8	EXTENSION GRADE, STRANDED WIRE, SPECIAL TOLERANCES

SPECIFICATIONS

CONTINUOUS TEMPERATURE RATING 1300° F (705° C)
 SINGLE READING 1600° F (870° C)

CONSTRUCTION HIGH TEMPERATURE FIBERGLASS BRAID SINGLE CONDUCTOR INSULATION
 IMPREGNATED WITH MODIFIED RESIN FOR ADDED ABRASION RESISTANCE.
 IMPREGNATION RETAINED TO 400° F (204° C)

APPLICATIONS LABORATORIES
 INDUSTRIAL EQUIPMENT TESTING
 AUTOMOTIVE

RESISTANCE PROPERTIES			
TEMP.	MOISTURE	CHEMICAL	ABRASION
1300° F (705° C)	GOOD	GOOD	GOOD