


FIBERGLASS WRAPPED THERMOCOUPLE AND EXTENSION WIRE

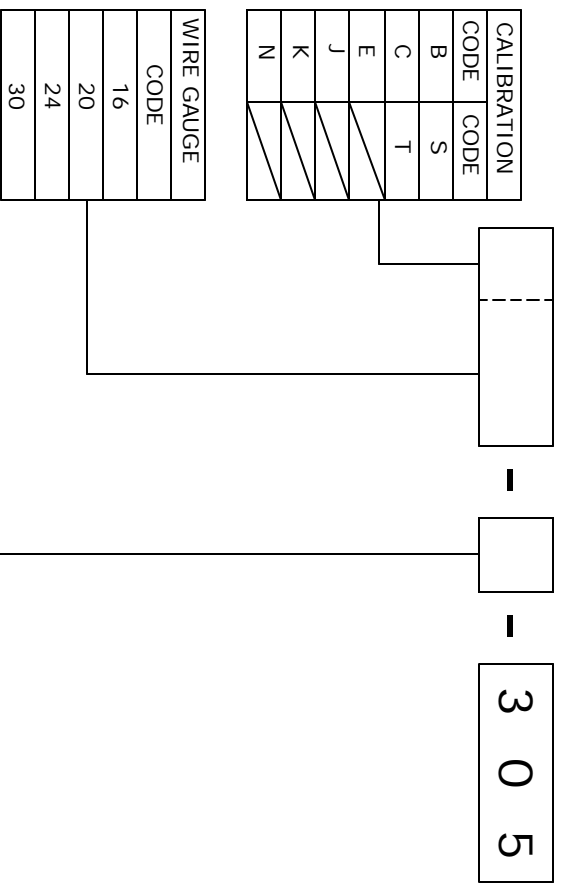

CONDUCTOR TYPE / TOLERANCE		DESCRIPTION
1	THERMOCOUPLE GRADE, SOLID WIRE, STANDARD TOLERANCES	
2	THERMOCOUPLE GRADE, SOLID WIRE, SPECIAL TOLERANCES	
3	THERMOCOUPLE GRADE, STRANDED WIRE, STANDARD TOLERANCES	
4	THERMOCOUPLE GRADE, STRANDED WIRE, SPECIAL TOLERANCES	
5	EXTENSION GRADE, SOLID WIRE, STANDARD TOLERANCES	
6	EXTENSION GRADE, SOLID WIRE, SPECIAL TOLERANCES	
7	EXTENSION GRADE, STRANDED WIRE, STANDARD TOLERANCES	
8	EXTENSION GRADE, STRANDED WIRE, SPECIAL TOLERANCES	

SPECIFICATIONS

CONTINUOUS TEMPERATURE RATING 900° F (480° C)
 SINGLE READING 1000° F (540° C)

CONSTRUCTION DOUBLE FIBERGLASS WRAP SINGLE CONDUCTOR INSULATION, IMPREGNATED WITH MODIFIED RESIN TO ADD ABRASION RESISTANCE AND ENHANCE ELECTRICAL PROPERTIES. IMPREGNATION RETAINED TO 400° F (204° C)

APPLICATIONS
 STEEL AND ALUMINUM PLANTS
 HEAT TREATING
 GLASS, CERAMIC AND BRICK PLANTS
 FOUNDRIES

RESISTANCE PROPERTIES			
TEMP.	MOISTURE	CHEMICAL	ABRASION
900° F	GOOD	GOOD	FAIR