


HIGH DENSITY CARTRIDGE HEATERS

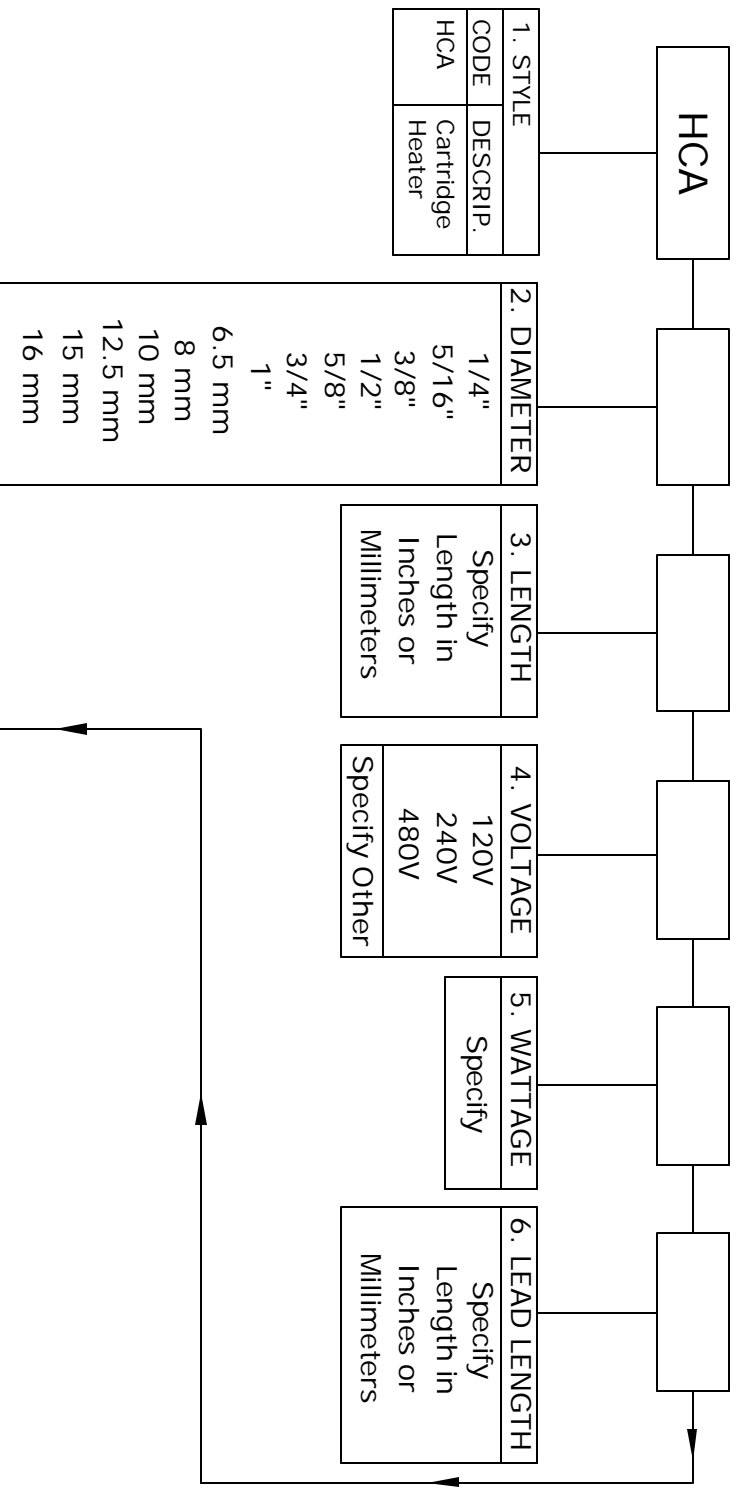

SPECIFY	DESCRIPTION
FG	Hi-Temp Fiberglass
FGS	Hi-Temp Fiberglass with SSOB
FGA	Hi-Temp Fiberglass with SS Armor
T	Teflon
TS	Teflon with SS Armor

SPECIFY	DESCRIPTION
90D	90° From Sheath
90DC	90° Copper Elbow
CL	Clip Support
90CL	90° Clip Support
B	NPT Bushing *
FL	Flange *
SR	Straight Strain Relief Spring
HB	Hex Center Bushing
90DS	Right Angle Elbow w/ Spring
ST	Screw Terminals
DW	Distributed Wattage *
TC	Internal Thermocouple
NS	Non-Stick Coating
*	SPECIFY NPT SIZE, FLANGE SIZE OR WATTAGE DISTRIBUTION

SPECIFY	DESCRIPTION
BLANK	Standard Stripped Leads
PL	Plug (Specify Type)