


HIGH DENSITY SQUARE CARTRIDGE HEATERS

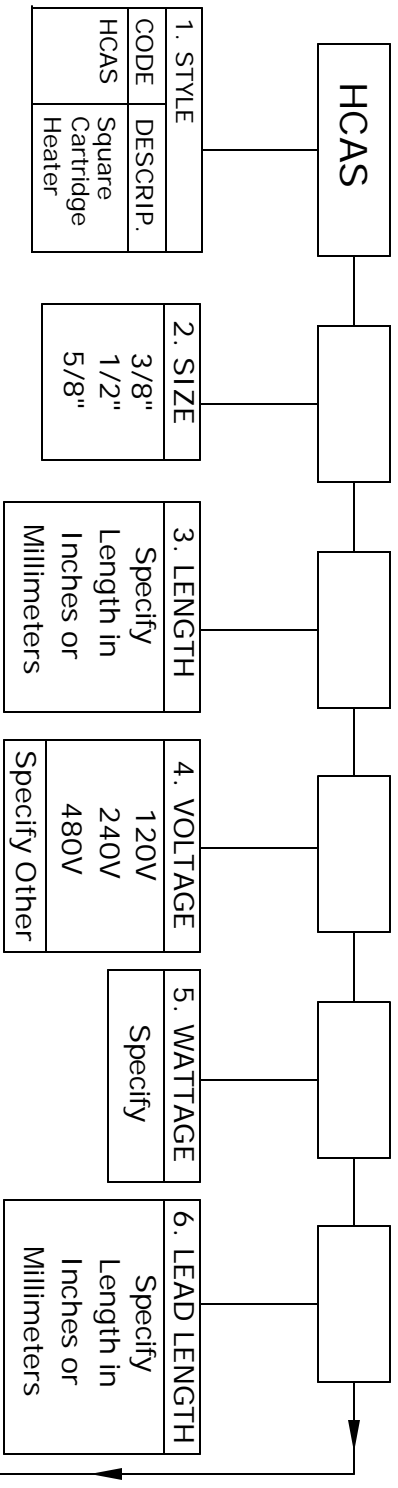

7. LEAD TYPE	
SPECIFY	DESCRIPTION
FG	Hi-Temp Fiberglass
FGS	Hi-Temp Fiberglass with SSOB
FGA	Hi-Temp Fiberglass with SS Armor
T	Teflon
TS	Teflon with SS Armor

8. LEAD EXIT AND OPTIONS	
SPECIFY	DESCRIPTION
CL	Straight Clip Support
90CL	90° Clip Support
SR	Spring
90D	90° Braid
*	SPECIFY NPT SIZE, FLANGE SIZE OR WATTAGE DISTRIBUTION

9. LEAD TERMINATION OPTIONS	
SPECIFY	DESCRIPTION
BLANK	Standard Stripped Leads
PL	Plug (Specify Type)