


PROGRAMMABLE RTD TEMPERATURE TRANSMITTERS - SERIES 440

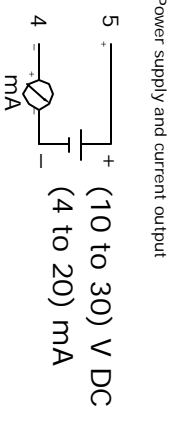


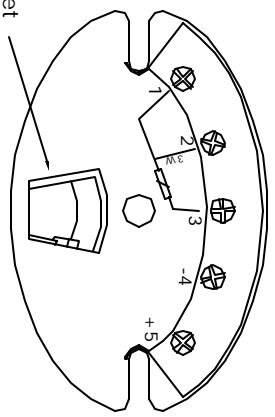
Environmental Conditions

Ambient temperature	-40 to 85° C (-40 to 185° F)
Storage temperature	-40 to 100° C (-40 to 212° F)
Climatic class	EN 60 654-1, Class C
Condensation	Permitted
Shock resistance	4 g / (2 to 150) Hz according to IEC 60 068-2-6
EMC immunity	Interference immunity and interference according to EN 61 326-1 (1EC 1326)




Mechanical Construction

Dimensions		
Weight	Approximately 44 g	
Materials	Housing: Polycarbonate	Potting: Polyurethane
Terminals	15 AWG (maximum)	

Terminal Connections

Power supply and current output		
 <p>5 + (10 to 30) V DC 4 - (4 to 20) mA mA</p>		
 <p>2-Wire</p>	 <p>3-Wire</p>	
 <p>SETUP socket</p>		

Approvals

  	<p>Unit complies with the legal requirements set forth by the EU regulations</p> <p>UL Recognized Component</p> <p>General Purpose and non-incendive for use in hazardous locations Class 1, Division 2 Groups A, B, C and D</p>
---	--